




The Waterboy-Series of PV modules offer a conversion efficiency of 17-20% due to the unique back-contact technology. Our monocrystalline silicon solar cells yield a higher voltage per cell, therefore 60 cells are sufficient to provide the same voltage as traditional 72-cell modules. As a result, BWSolar modules are lighter and smaller. In combination with an extremely low voltage-temperature coefficient, this guarantees a superior battery charging performance, even at high operating temperatures. Exceptional low-light performance and broad spectral response further enhance energy delivery in all weather conditions, year round.

Features

- Photovoltaic modules made with unique SunPower cells.
- Cells with high conversion efficiency of up to 20%.
- Due to the high efficiency, the modules are smaller in size than modules made with conventional cells.
- Modules are made with high quality materials which lead to the high reliability of the module.
- Designed to charge 12 to 48 volt batteries for off grid remote power systems.
- Manufactured in ISO9001 certified factory.

Applications

- Water pumping
- On and off-grid home solar systems
- Street and camp lights
- Traffic signals
- Medical facilities in remote areas
- Microwave/radio repeater stations
- Battery charging
- Remote location lighting
- Water purification systems

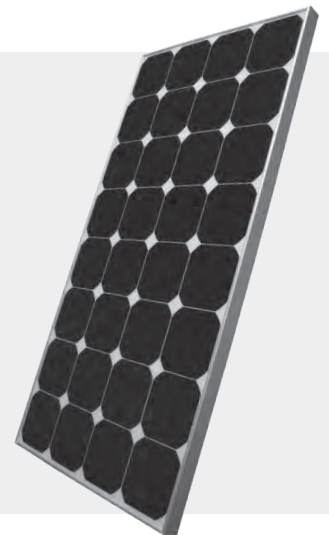

Warranty

2 years Warranty. Performance guarantee: 10 years (90% power output) 20 years (80% power output) Details according to warranty issued by BW Solar

Electrical Characteristics

Max Power	PMax	170W
Max Power Voltage	Vmmp	32.7V
Max Power Current	Immp	5.20A
Open Circuit Voltage	Voc	39.2V
Short Circuit Current	Isc	5.80A
Maximum System Voltage		600V
Series Fuse Rating		10A

Temperature Coefficients

- Power	-0.38%/°C
- Voltage	-60.8mV/°C
- Current	2.2mA/°C

Cell Efficiency	18.7%
Number of Cells in Series	60
Max Power Tolerance	+5%

Mechanical Characteristics

Weight	16.0kg
Dimension	1556*669*35
Frame	>10um clear anodized

